



MCC-Series

Install between the machine and oil tank. Permanent magnets rotating inside the conveyor, the chips under 60mm will be carried, raised and discharges into the waste bin. The magnets are rotating inside the conveyor. There are no moving parts on the outside. Provides optimum sealing performance allowing you to put this system into the oil tank.

Applications

- Hobbing machines
- Broaching
- Milling machines
- Lathes
- Drilling machines
- Punching machines
- Custom Machines

Custom Dimensions upon your request for: W, L, and H

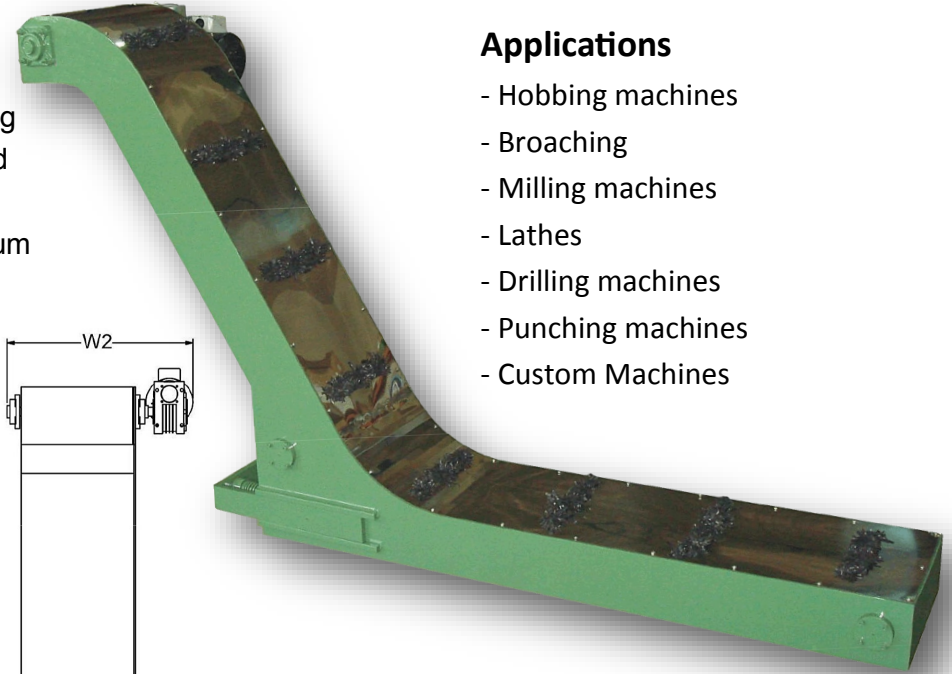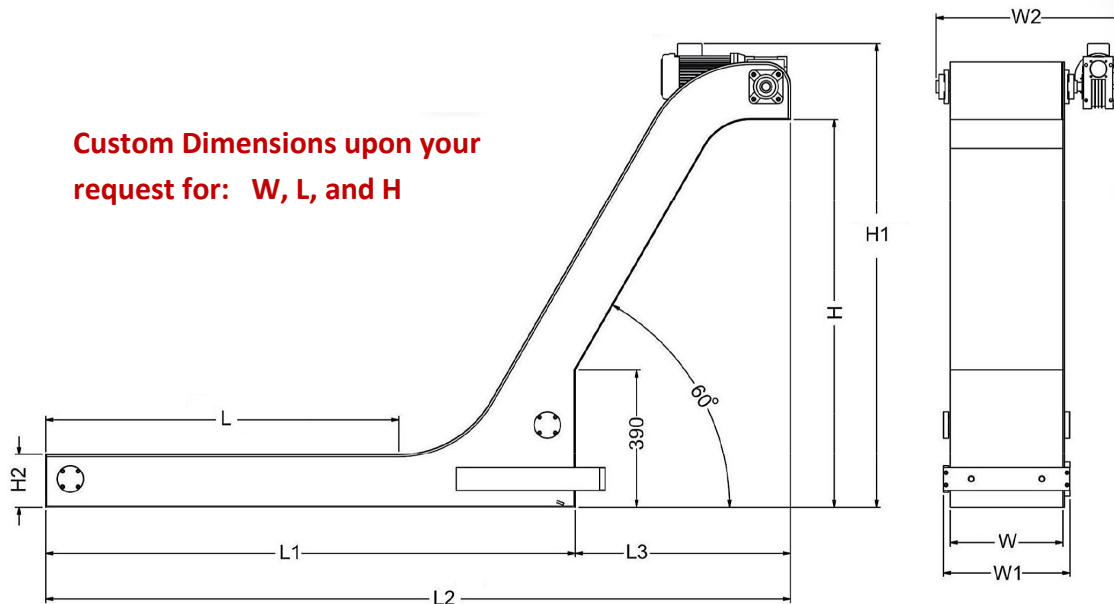

Model	Handle Weight	Velocity	Motor	Reduction Ratio	L	L1	L2	L3	H	H1	H2	W	W1	W2
MCC-230	20 kg/H	2.8	1/4-hp	1/200	500	1000	1635	635	1100	1315	150	230	280	430
					1000	1500	2135							
MCC-330	33 kg/H	2.8	1/4-hp	1/200	500	1000	1635	635	1100	1315	150	330	380	530
					1000	1500	2135							
MCC-430	45 kg/H	2.8	1/4-hp	1/200	500	1000	1635	635	1100	1315	150	430	480	630
					1000	1500	2135							